

Biotainer

(#562000, 565000)

1. Description

The Biotainer is manufactured using transparent Polycarbonate and can store large volumes of samples. Various samples can be stored due to The high durability of the Biotainer and can be used at -80 ~ 100℃ And silicon pad is inserted inside of the cap to effectively prevent leakage.

2. Features

- ❖ Autoclavable
- ❖ Non-pyrogenic
- ❖ Non-cytotoxic
- ❖ DNase / RNase - free
- ❖ Human DNA - free
- ❖ Working temperature range: -80 ~ 100 °C

3. Product Range

Cat. No.	Material	Diameter x height (mm)	Color	Sterile	Packaging
562000	PC/PP	110 x 268	clear	+	4 / 20
565000	PC/PP	166 x 299	clear	+	1 / 6

4. Certification

SPL Life Sciences hereby certifies that the product identified above, inspected to be in compliance with product quality specification and requirements as documented in our ISO 9001:2015 Quality Management System (K-QA-Q031478) in Korea.

5. Product Photographs



SPL-TDS-SEALT


For Research Use Only. Not intended for use in diagnostic or therapeutic procedures.
© SPL Life Sciences Co., Ltd., Version 2, November 20th, 2018

6. Specifications & Technical Drawing

(1) 2L Biotainer (#562000)
- Specifications

Dimensions	Material (Resin)	Packaging
Diameter 110.0 mm Height: 268.0 mm	▪ Bottle: Polycarbonate (PC) ▪ Cap : Polypropylene (PP)	▪ Sleeve/case: 4 / 20

- Technical Drawing

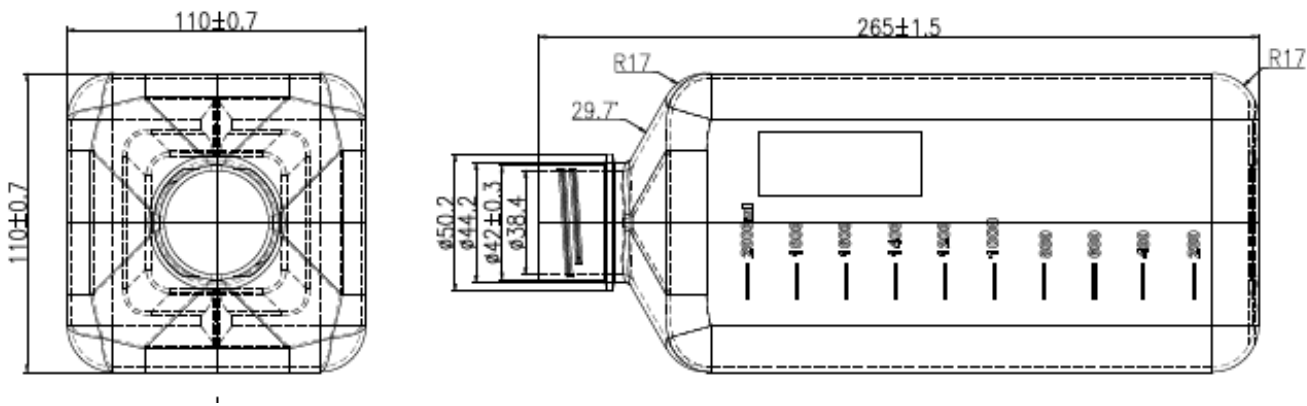


(2) 5L Biotainer (#565000)

- Specifications

Dimensions		Material (Resin)	Packaging
Diameter	166.0 mm	<ul style="list-style-type: none"> ▪ Bottle: Polycarbonate (PC) ▪ Cap : Polypropylene (PP) 	<ul style="list-style-type: none"> ▪ Sleeve/case: 1 / 6
Height:	299.0 mm		

- Technical Drawing

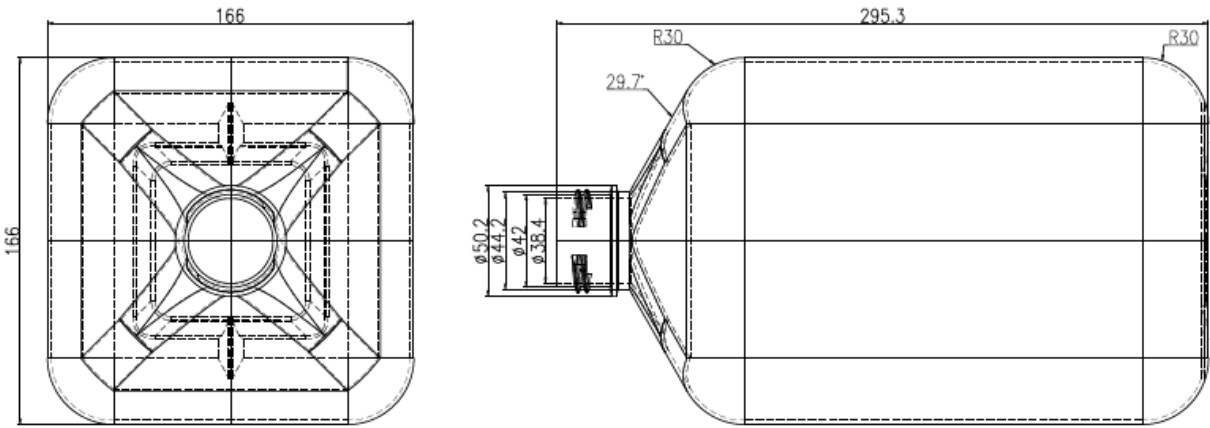

12086 Miramar Pkwy
 Miramar, Florida, 33025, USA
 +1 (305) 600-0444
 info@prolabcorp.com
 www.prolabcorp.com

SPL-TDS-SEALT